C20

110v

24v

200N

20kg

240-360mm a d j u s t a b l e



ING

RING

ING

ING

ING

ING

ING

ING

ING

ING



VEN

VEN

VEN

VEN **VEN**

VEN

VEN

VEN


VEN


VEN


VEN


VENT ENGINEERI


VENT ENGINEER **VENT ENGINEERING**

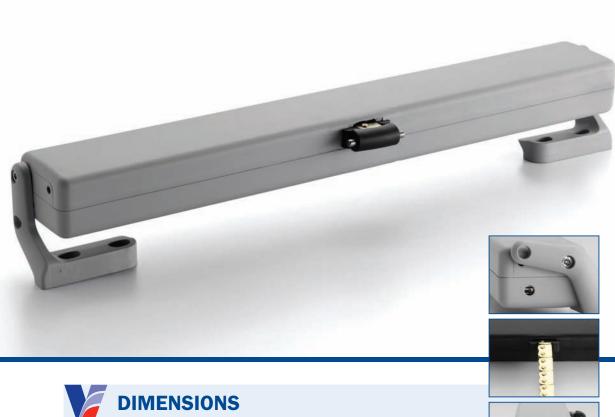
















FIXINGS AND BRACKETS AVAILABLE

top hung bracket



bottom hung bracket



vertical mounting bracket



110v

24v

200N

20kg

240-360mm adjustable

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING

VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING

VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

VENT ENGINEERING VENT ENGINEERING

C20



TECHNICAL SPECIFICATIONS

C20 230v

Voltage Supply 230v **Thrust Force** 200N **Traction Force** 200N Stroke 240mm/360mm **Absorbed Current** 0.12 amps S2 3mins **Time Rating**

Limit Stop electronic Safety Stop not necessary Wiring 4 core Speed \sim 10mm/s **Double Insulated** yes **IP30 Protection Class**

Parallel Connection Option yes - special order Weight

0.970kg

Colours Available white / black / silver C20 24v

UPGRADE

available

• 110v available

24v 200N 200N

240mm/360mm 0.36 amps S2 3mins electronic not necessary 2 core \sim 9.7mm/s

no IP30

yes - special order

0.940kg

white / black / silver



PRODUCT SUMMARY

- Double link chain with very high resistance on top loads.
- Adjustment of the stroke at 240 or 360mm, simple and fast.
- High stroke, together with a reduced size of the actuator, to allow applications that require minimum size.
- · Automatic stop on closing stroke between 1mm to 100mm
- · Central chain position
- · Double insulated electrics.
- Simple swivel bracket for fast installation.
- Fast hooking and unhooking system of the chain to the window (international patent).

- · Available in black, silver and white.
- **CE** Complies with the CEE EN 60335-1, 89/336 CEE (electromagnetic compatibility) regulations.80A



PRODUCT CODES

PRODUCT CODE PRODUCT DESCRIPTION

AT-C20-230 C20 230v AT-C20-24 C20 24v



NO ONE OPENS MORE VENTS

tel 01202 744958, fax 01202 733026 email info@vent.co.uk website www.vent.co.uk Units 16c & 16f, Chalwyn Industrial Estate, Poole BH12 4PE