(external) finished face of the upstand. The builder/contractor is responsible for the The CRITICAL DIMENSION is to the outer

of lantern. Dimensions to be approved prior to manufacture construction of the upstand.

additional inner cills, coving or cover beading. Builder is responsible for all wiring of motors and running cables to switches and installing of Lantern comes to site in kit form. switches The builder/contactor is responsible for


To include:

1. Colour:

Internal - Standard white External - Standard white


2. Pilkington Active Neutral (by default)please instruct at time of order if you require a blue tint3. 25° pitch


IF A DIFFERENT ROOF COVERING / BUILDUP IS PREFERRED THE INTERNAL DIMENSION SHOULD BE AMENDED NOT THE EXTERNAL DIMENSIONS

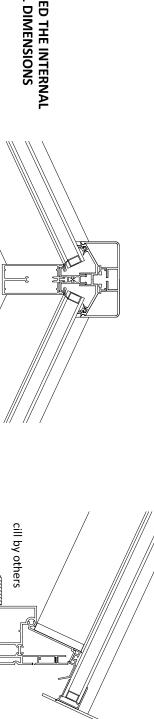

THIS IS NOT A CONSTRUCTION DRAWING




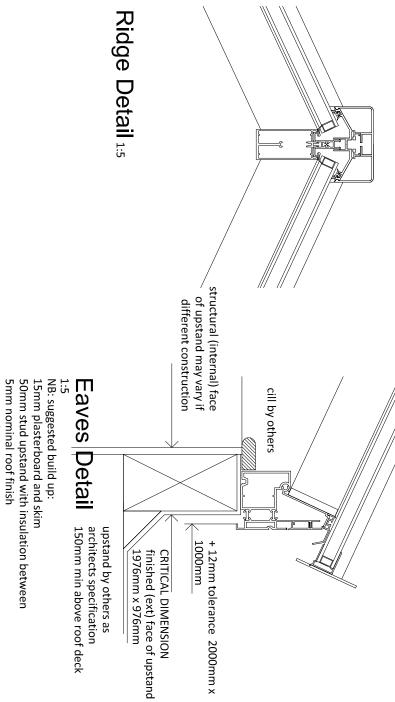

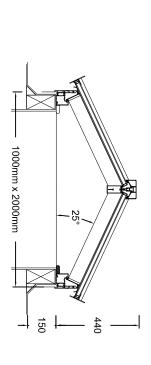


12mm tolerance

Section 1:20

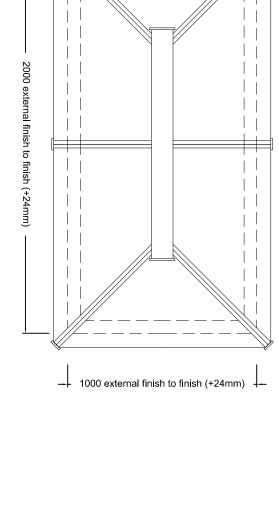

Plan 1:20

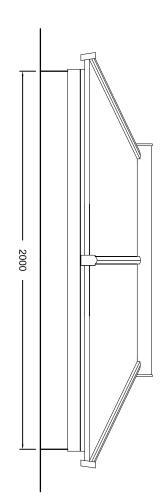

Side Elevation 1:20

1000

End Elevation 1:20

	THIS IS NOT A CONSTRUCTION DRAWING	THIS IS NOT	A3
DWG No: LARL-Stock-01	ALL DIMENSIONS MUST BE CHECKED ON SITE. DO NOT SCALE OFF THIS DRAWING EXCEPT FOR PLANNING PURPOSES. THIS DRAWING MUST BE READ IN CONJUNCTION WITH THE SPECIFICATION OF WORKS. ALL WORKS MUST BE CARRIED OUT IN ACCORDANCE WITH THE STATUTORY AUTHORITIES.	ALL DIMENSIONS MUST BE CHECKED ON SITE. I MUST BE READ IN CONJUNCTION WITH THE SPE STATUTORY AUTHORITIES.	Scale 1:20/5 @
1000mm x 2000mm Roof Lantern @ 25°	:	:	27.07.2015
DWG Ref :	Address	Client	Date

Aluminiun **Roof Lanterns**

Unit 8, Rye Harbour Industrial Estate, Rye Harbour Road, Rye, East Sussex, TN31 7TE enquiries@aluminiumrooflanterns.com

01797 229 639